



EXCALIBUR WATER SYSTEMS

COMMERCIAL WATER SOFTENER

SYSTEM DESIGN DATA & SPECIFICATIONS

Model: EWS SD15150

Water Softener 1.5" Duplex Alternating 150,000 Capacity

Water Softener Operating Parameters


Minimum Flow Rate, gpm	: 3.5
Critical Flow Rate, gpm	: 14.0
Service Flow Rate, gpm	: 21.0
Flow Rate 15psi ΔP, gpm	: 40.0
Flow Rate 25psi ΔP, gpm	: 54.0
Backwash Flow Rate, gpm	: 9.0
Capacity @15lbs/ft ³ , kgr	: 150.0
Capacity @10lbs/ft ³ , kgr	: 135.0
Capacity @6lbs/ft ³ , kgr	: 100.0
Capacity Max System, kgr	: 300.0
Salt Usage @ 15lbs/ft ³ , lbs	: 75.0
Salt Usage @ 10lbs/ft ³ , lbs	: 50.0
Salt Usage @ 6lbs/ft ³ , lbs	: 30.0
Resin Qty, ft ³	: 5.0
#20 Gravel Qty, lbs	: 100.0
Distributor Size, in	: 1.5
Drain Line Size, in	: 1.5
Brine Line Size, in	: 0.5

Miscellaneous Design Data

Mineral Tank Size, in.	: 18x65
Freeboard, in.	: 22.0
Bed Depth, in	: 33.9
Brine Tank Size, in.	: 24x50
Max. Salt Load, lbs.	: 900 (Dry)
Total Regeneration Time, min.	: 113
Operating Pressure, psi	: 40-110
Operating Temperature, ° F	: 40-110
Shipping Weight, lbs.	: 1,100
Operating Weight, lbs.	: 3,250
Space Req'd in, L x W x H	: 83x29x92

Electrical Specifications

Supply Voltage	: 120VAC
Supply Frequency	: 60 Hz
Output Voltage	: 15VDC
Output Current:	: 500 mA

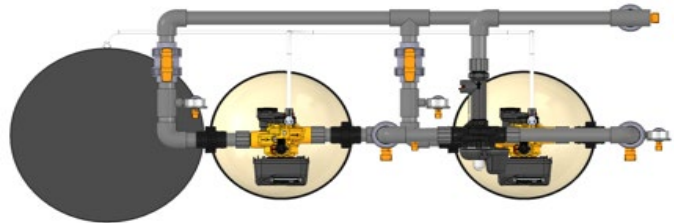

** Pipe and fittings shown not in scope*