

EXCALIBUR WATER SYSTEMS

COMMERCIAL WATER SOFTENER

SYSTEM DESIGN DATA & SPECIFICATIONS

Model: EWS SD2MQC300

Water Softener 2.0" QC Duplex Alternating 300,000 Capacity

Water Softener Operating Parameters


Minimum Flow Rate, gpm	: 6.5
Critical Flow Rate, gpm	: 25.0
Service Flow Rate, gpm	: 40.0
Flow Rate 15psi ΔP, gpm	: 73.0
Flow Rate 25psi ΔP, gpm	: 94.0
Backwash Flow Rate, gpm	: 15.0
Capacity @15lbs/ft ³ , kgr	: 300.0
Capacity @10lbs/ft ³ , kgr	: 270.0
Capacity @6lbs/ft ³ , kgr	: 200.0
Capacity Max System, kgr	: 600.0
Salt Usage @ 15lbs/ft ³ , lbs	: 150.0
Salt Usage @ 10lbs/ft ³ , lbs	: 100.0
Salt Usage @ 6lbs/ft ³ , lbs	: 60.0
Resin Qty, ft ³	: 10.0
#20 Gravel Qty, lbs	: 100.0
1/4"X1/8" Gravel Qty, lbs	: 100.0
Distributor Size, in	: 2.0
Drain Line Size, in	: 1.5
Brine Line Size, in	: 0.5

Miscellaneous Design Data

Mineral Tank Size, in.	: 24x72
Freeboard, in.	: 20.5
Bed Depth, in	: 38.5
Brine Tank Size, in.	: 30x50
Max. Salt Load, lbs.	: 1,400 (Dry)
Total Regeneration Time, min.	: 125
Operating Pressure, psi	: 40-110
Operating Temperature, ° F	: 40-110
Shipping Weight, lbs.	: 2,900
Operating Weight, lbs.	: 8,500
Space Req'd in, L x W x H	: 97x35x108

Electrical Specifications

Supply Voltage	: 120VAC
Supply Frequency	: 60 Hz
Output Voltage	: 15VDC
Output Current:	: 500 mA

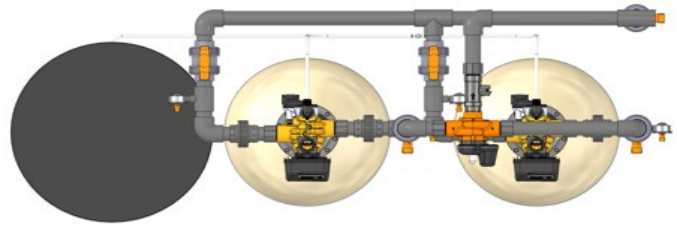

** Pipe and fittings shown not in scope*