EXCALIBUR WATER SYSTEMS

COMMERCIAL WATER SOFTENER

Quality through innovation

SYSTEM DESIGN DATA & SPECIFICATIONS

Model: EWS SC125560

Water Softener 1.25" Fiveplex Progressive 60,000 Capacity

Water Softener Operating Parameters

Minimum Flow Rate, gpm	: 1.6
Critical Flow (Progressive), gpm	: 6.5 (32.5)
Service Flow (Progressive), gpm	: 9.5 (47.5)
Flow (Progressive) 15psi ΔP, gpm	: 23.0 (115.0)
Flow (Progressive) 25psi ΔP, gpm	: 31.0 (155.0)
Backwash Flow Rate, gpm	: 3.2
Capacity @15lbs/ft^3, kgr	: 60.0
Capacity @10lbs/ft^3, kgr	: 54.0
Capacity @6lbs/ft^3, kgr	: 40.0
Salt Usage @15lbs/ft³, lbs	: 30.0
Salt Usage @10lbs/ft³, lbs	: 20.0
Salt Usage @6lbs/ft³, lbs	: 12.0
Capacity Max System, kgr	: 300.0
Resin Qty, ft³	: 2.0
#20 Gravel Qty, lbs	: 20.0
Distributor Size, in	: 1.32
Drain Line Size , in	: 0.75
Brine Line Size , in	: 0.375

Miscellaneous Design Data

Mineral Tank Size, in.	: 12x52
Freeboard, in.	: 15.0
Bed Depth, in	: 30.5
Brine Tank Size, in.	: 18x40
Max. Salt Load, lbs.	: 450 (Dry)
Regeneration/Vessel Time, min.	: 93
Operating Pressure, psi	: 40-110
Operating Temperature, ° F	: 40-110
Shipping Weight, lbs.	: 940
Operating Weight, lbs.	: 4,000
Space Req'd in, L x W x H	: 168x28x79

Electrical Specifications

Supply Voltage	: 120VAC
Supply Frequency	: 60 Hz
Output Voltage Nominal	: 12VAC
Output Current (max per valve)	: 0.5A

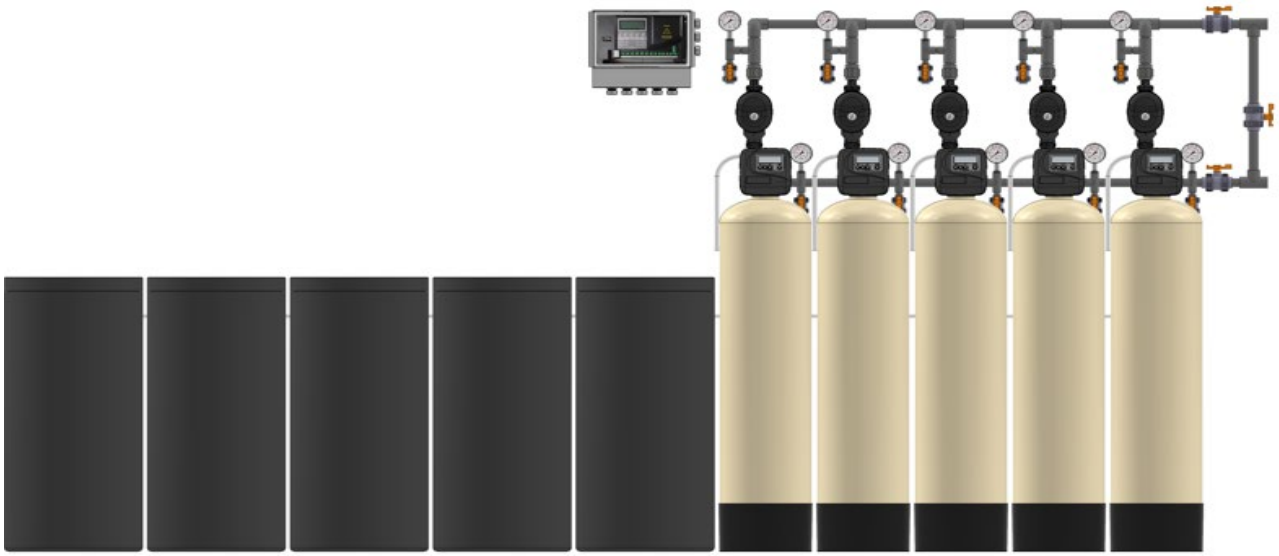

* Pipe and fittings shown not in scope