

EXCALIBUR WATER SYSTEMS

COMMERCIAL WATER SOFTENER

SYSTEM DESIGN DATA & SPECIFICATIONS

Model: EWS SC2MQC2210

Water Softener 2.0" QC Duplex Progressive 210,000 Capacity

Water Softener Operating Parameters


Minimum Flow Rate, gpm	: 4.8
Critical Flow (Progressive), gpm	: 19.0 (38.0)
Service Flow (Progressive), gpm	: 30.0 (60.0)
Flow (Progressive) 15psi ΔP, gpm	: 66.0 (132.0)
Flow (Progressive) 25psi ΔP, gpm	: 85.0 (170.0)
Backwash Flow Rate, gpm	: 11.0
Capacity @15lbs/ft ³ , kgr	: 210.0
Capacity @10lbs/ft ³ , kgr	: 189.0
Capacity @6lbs/ft ³ , kgr	: 140.0
Salt Usage @ 15lbs/ft ³ , lbs	: 105.0
Salt Usage @ 10lbs/ft ³ , lbs	: 70.0
Salt Usage @ 6lbs/ft ³ , lbs	: 42.0
Capacity Max System, kgr	: 420.0
Resin Qty, ft ³	: 7.0
#20 Gravel Qty, lbs	: 50.0
1/4"X1/8" Gravel Qty, lbs	: 100.0
Distributor Size, in	: 2.0
Drain Line Size, in	: 1.5
Brine Line Size, in	: 0.5

Miscellaneous Design Data

Mineral Tank Size, in.	: 21x62
Freeboard, in.	: 17.0
Bed Depth, in	: 34.9
Brine Tank Size, in.	: 24x50
Max. Salt Load, lbs.	: 900 (Dry)
Total Regeneration Time, min.	: 125
Operating Pressure, psi	: 40-110
Operating Temperature, ° F	: 40-110
Shipping Weight, lbs.	: 2,195
Operating Weight, lbs.	: 7,600
Space Req'd in, L x W x H	: 112x45x96

Electrical Specifications

Supply Voltage	: 120VAC
Supply Frequency	: 60 Hz
Output Voltage Nominal	: 12VAC
Output Current (max per valve)	: 0.5A

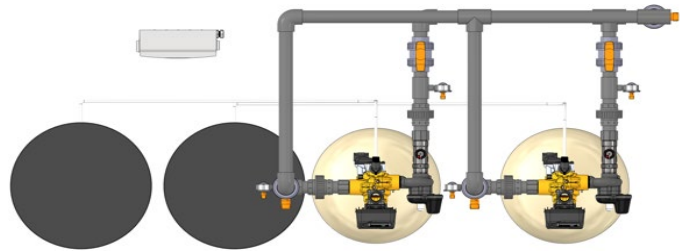

** Pipe and fittings shown not in scope*