



EXCALIBUR WATER SYSTEMS

COMMERCIAL WATER SOFTENER

SYSTEM DESIGN DATA & SPECIFICATIONS

Model: EWS S2MQC150
Water Softener 2.0" QC Simplex 150,000 Capacity

Water Softener Operating Parameters



| | |
|--|---------|
| Minimum Flow Rate, gpm | : 3.5 |
| Critical Flow Rate, gpm | : 14.0 |
| Service Flow Rate, gpm | : 21.0 |
| Flow Rate 15psi ΔP, gpm | : 53.0 |
| Flow Rate 25psi ΔP, gpm | : 69.0 |
| Backwash Flow Rate, gpm | : 9.0 |
| Capacity @15lbs/ft ³ , kgr | : 150.0 |
| Capacity @10lbs/ft ³ , kgr | : 135.0 |
| Capacity @6lbs/ft ³ , kgr | : 100.0 |
| Capacity Max System, kgr | : 150.0 |
| Salt Usage @ 15lbs/ft ³ , lbs | : 75.0 |
| Salt Usage @ 10lbs/ft ³ , lbs | : 50.0 |
| Salt Usage @ 6lbs/ft ³ , lbs | : 30.0 |
| Resin Qty, ft ³ | : 5.0 |
| #20 Gravel Qty, lbs | : 100.0 |
| Distributor Size, in | : 2.0 |
| Drain Line Size, in | : 1.5 |
| Brine Line Size, in | : 0.5 |

Miscellaneous Design Data

| | |
|-------------------------------|-------------|
| Mineral Tank Size, in. | : 18x65 |
| Freeboard, in. | : 22.0 |
| Bed Depth, in | : 33.9 |
| Brine Tank Size, in. | : 24x50 |
| Max. Salt Load, lbs. | : 900 (Dry) |
| Total Regeneration Time, min. | : 113 |
| Operating Pressure, psi | : 40-110 |
| Operating Temperature, ° F | : 40-110 |
| Shipping Weight, lbs. | : 660 |
| Operating Weight, lbs. | : 2,185 |
| Space Req'd in, L x W x H | : 66x34x90 |

Electrical Specifications

| | |
|------------------|----------|
| Supply Voltage | : 120VAC |
| Supply Frequency | : 60 Hz |
| Output Voltage | : 15VDC |
| Output Current: | : 500 mA |

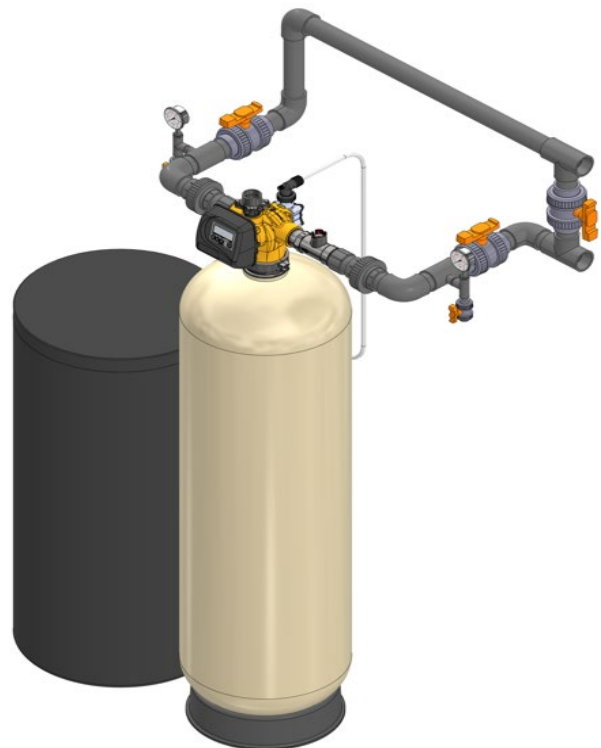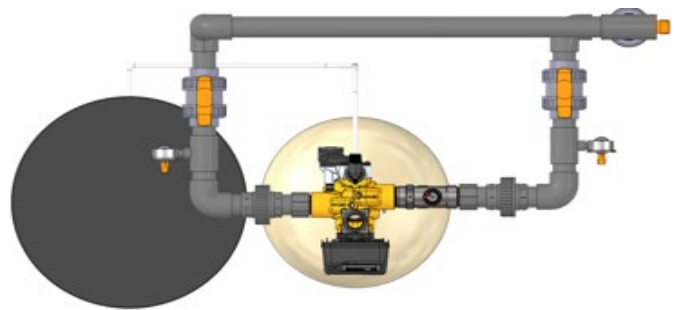

** Pipe and fittings shown not in scope*