

EXCALIBUR WATER SYSTEMS

COMMERCIAL WATER SOFTENER

SYSTEM DESIGN DATA & SPECIFICATIONS

Model: EWS SC2MQC61200

Water Softener 2.0"QC Sixplex Progressive 1,200,000 Capacity

Water Softener Operating Parameters


Minimum Flow Rate, gpm	: 25.0
Critical Flow (Progressive), gpm	: 100.0 (600.0)
Service Flow (Progressive), gpm	: 125.0 (750.0)
Flow (Progressive) 15psi ΔP, gpm	: 98.0 (588.0)
Flow (Progressive) 25psi ΔP, gpm	: 125.0 (750.0)
Backwash Flow Rate, gpm	: 60.0
Capacity @15lbs/ft ³ , kgr	: 1,200.0
Capacity @10lbs/ft ³ , kgr	: 1,080
Capacity @6lbs/ft ³ , kgr	: 800.0
Salt Usage @15lbs/ft ³ , lbs	: 600.0
Salt Usage @10lbs/ft ³ , lbs	: 400.0
Salt Usage @6lbs/ft ³ , lbs	: 240.0
Capacity Max System, kgr	: 7,200.0
Resin Qty, ft ³	: 40.0
#20 Gravel Qty, lbs	: 300.0
1/4"X1/8" Gravel Qty, lbs	: 600.0
Distributor Size, in	: 2.0
Drain Line Size, in	: 1.5
Brine Line Size, in	: 0.75

Miscellaneous Design Data

Mineral Tank Size, in.	: 48x72
Freeboard, in.	: 18.8
Bed Depth, in	: 38.2
Brine Tank Size, in.	: 50x60
Max. Salt Load, lbs.	: 4,500 (Dry)
Regeneration/Vessel Time, min.	: 125
Operating Pressure, psi	: 40-110
Operating Temperature, ° F	: 40-110
Shipping Weight, lbs.	: 23,340
Operating Weight, lbs.	: 78,000
Space Req'd in, L x W x H	: 602x59x122

Electrical Specifications

Supply Voltage	: 120VAC
Supply Frequency	: 60 Hz
Output Voltage Nominal	: 12VAC
Output Current (max per valve)	: 0.5A

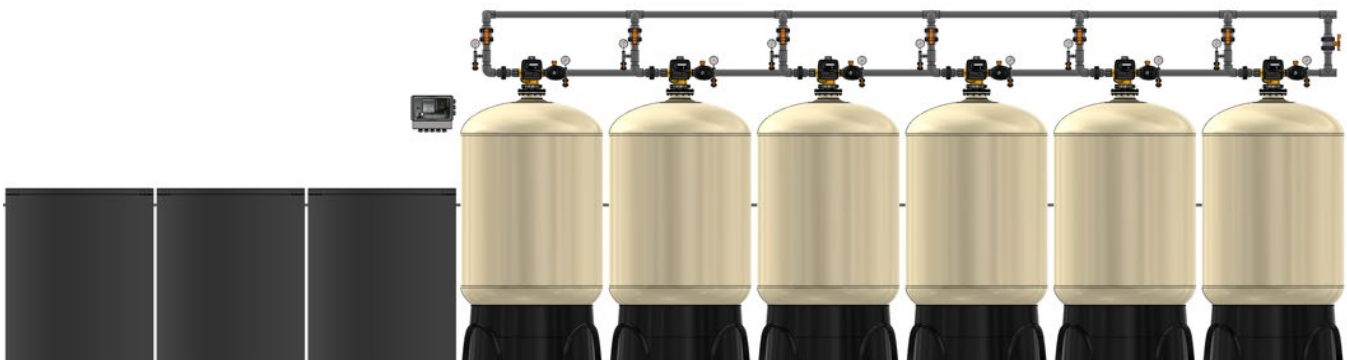

Note - Three brine tanks not shown

* Pipe and fittings shown not in scope